



Please follow the steps below to remove the top cover.

1. Remove the 4 screws holding the cover in place.

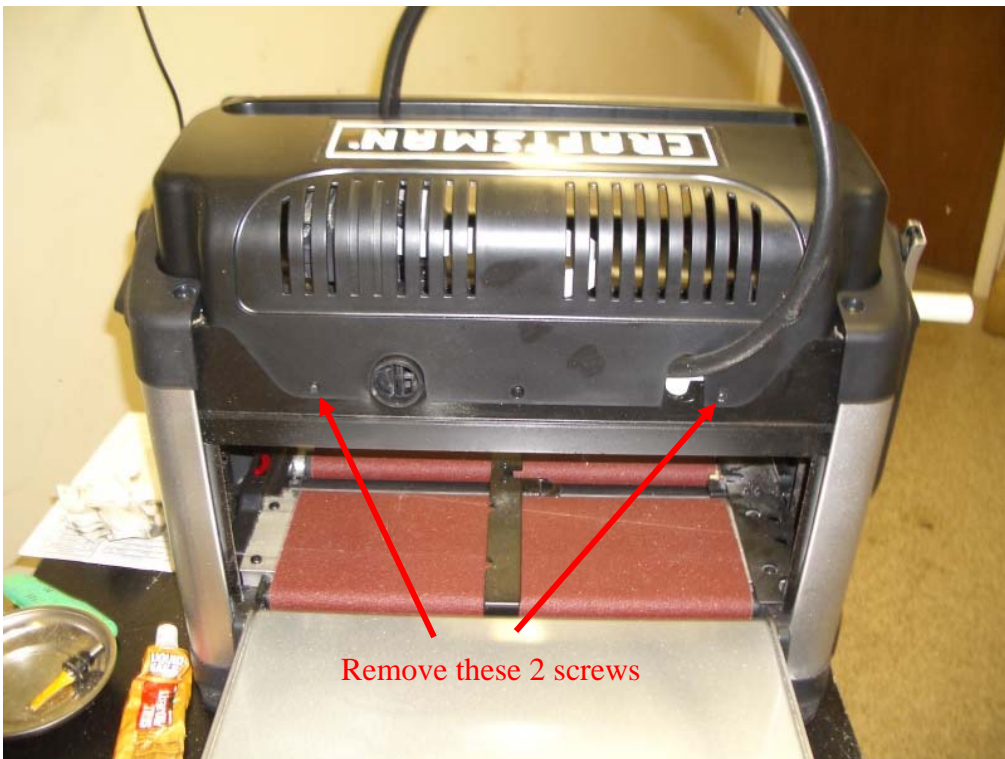


2. Disconnect wiring on keypad side of the machine.

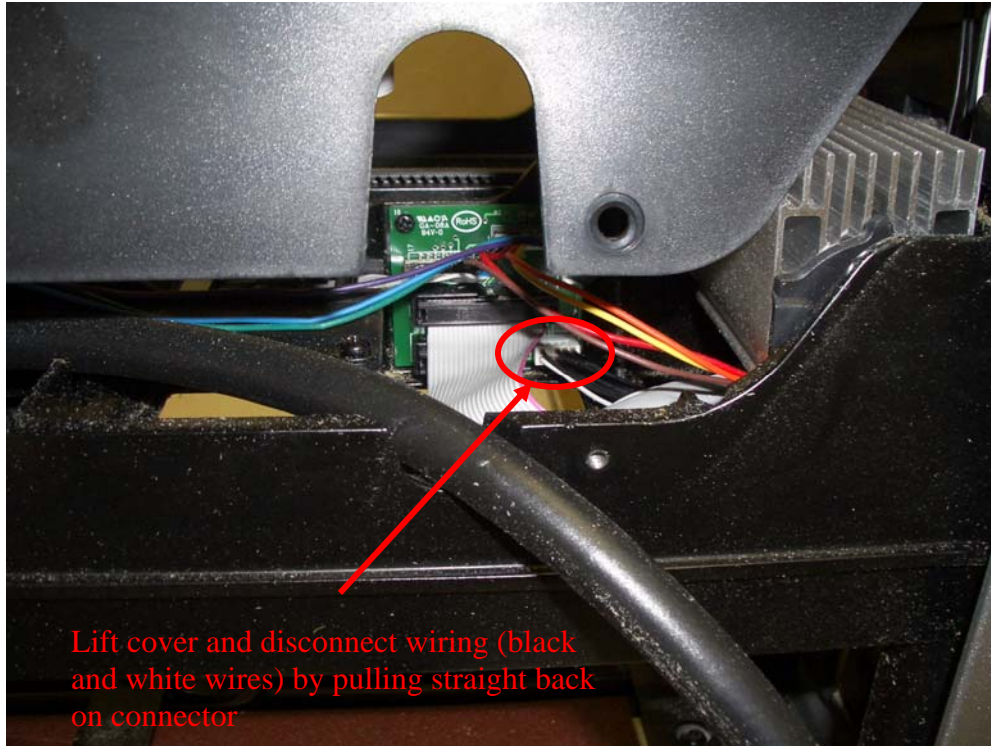


3. Lay cover over on non-keypad side.



4. To install cover, repeat steps above. NOTE: be careful to position the wiring, clips and blow deflector in the correct orientation.

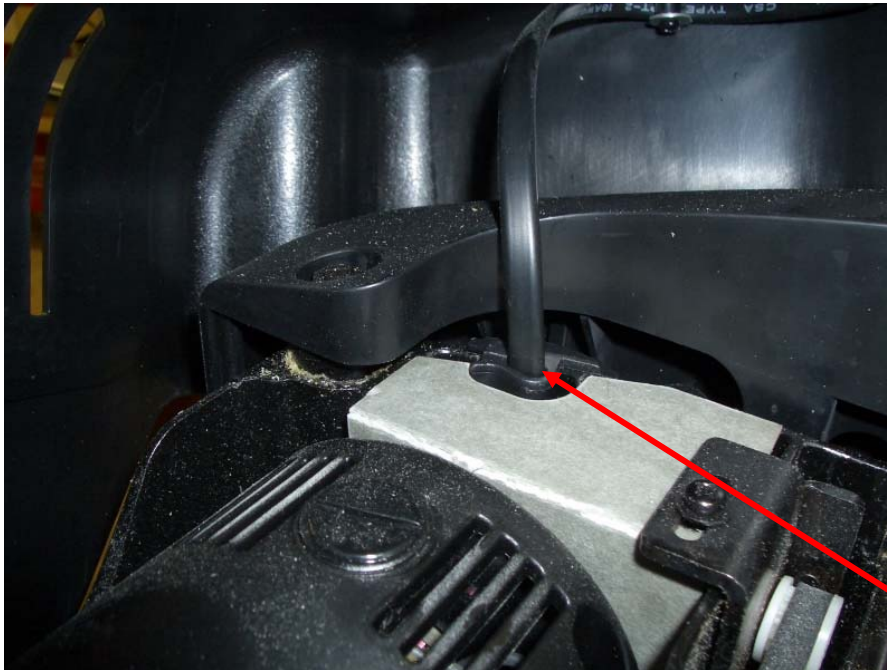

Make sure wire clips fit flush, and are captured by cover.

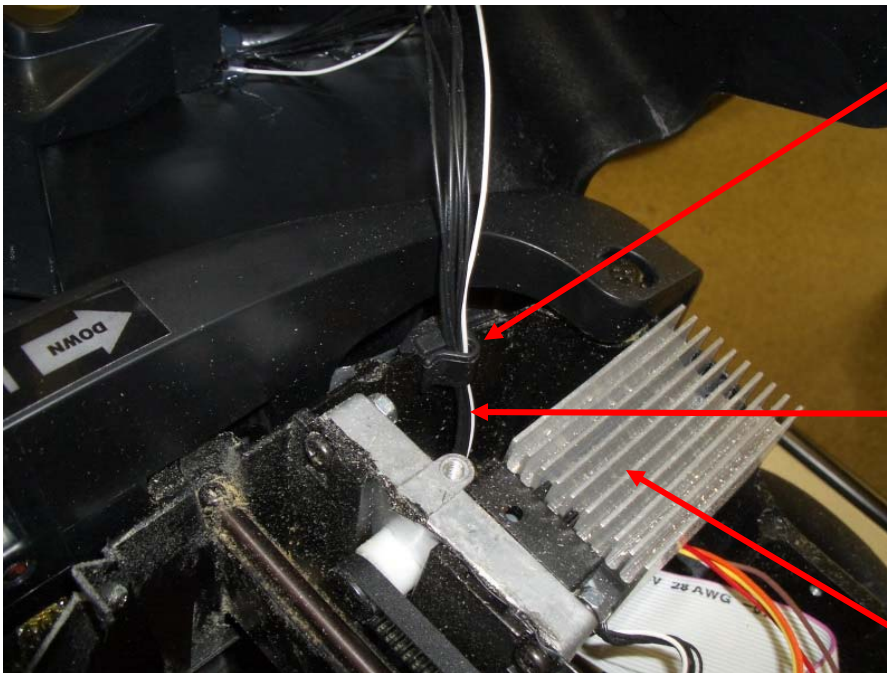

Also note, the connector unplugged in step 2, runs to the keypad side of the cover and under the Y-motor before plugging into the connector board.

Y-motor

